

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
11 March 2004 (11.03.2004)

PCT

(10) International Publication Number
WO 2004/019675 A1

(51) International Patent Classification⁷: **A01G 27/00**

(21) International Application Number:
PCT/GB2003/003750

(22) International Filing Date: 28 August 2003 (28.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0220022.8 29 August 2002 (29.08.2002) GB

(71) Applicant and

(72) Inventor: ANDU, Adedamola, Adebayo [GB/GB]; 29
Redwood Way, Barnet, Hertfordshire EN5 2RU (GB).

(74) Agent: BARKER BRETTELL; 138 Hagley Road, Edg-
baston, Birmingham B16 9PW (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

[Continued on next page]

(54) Title: PLANT WATERING APPARATUS

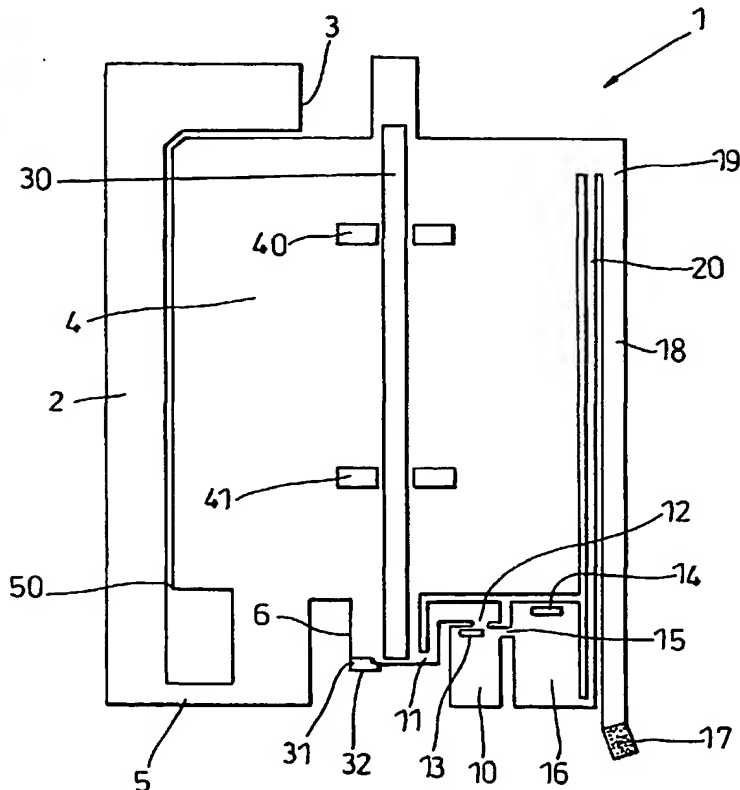

(57) Abstract: A self-watering apparatus (1) comprising: (i) a filling tube (2) with an opening (3) at high level, said tube (2) being in fluid communication with a delivery tube (5) located at low level; (ii) a main water holding reservoir (4) adapted, in use, to receive water from said delivery tube (5), said reservoir (4) being in fluid communication with a second delivery tube (11); (iii) at least one storage chamber (10) having a discharge orifice (13), said storage chamber (10) being adapted, in use, to receive water from the main water holding reservoir (4) by means of a second delivery tube (11) which optionally may have a capillary plug; (iv) optionally, one or more further storage chambers (16) having further discharge orifices (14) at least one of the further storage chambers (16) being in fluid communication with said chamber (10) and a pressure relieving tube (20), and (v) an outlet tube (18) with an opening (19) at high-level within said reservoir (4) through which air can be drawn into the apparatus under the control of a moisture-sensitive valve (17).

WO 2004/019675 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.